




KVHQ9⁴⁴/₄₅F电动三通球阀

一、产品概述:

三通球阀是综合国内外先进技术而开发的新型三通调节阀，用于分流或合流。标准球芯有 L 型三通双口孔道，改变球芯与管道的相对角度，可以对支管道流体实现不同的组合控制；T 型孔道可起配比作用，适用于液体、气体、蒸汽等介质的配比调节与控制。执行机构可根据用 PSQ, HQ, NB 等系列电子式电动执行机构。

二、主要外形及连接法兰尺寸

通径 Nominal size		外形尺寸 Outline Size					接法兰尺寸 Connecting Flange Size					
mm	in	L	L0	L1	L2	H	D	D1	D2	C	f	n-φd
15	1/2	150	75	140/178	62/75	185/191	95	65	46	14	2	4-φ14
20	3/4	150	75	164/214	75/91	197/225	105	75	56	16	2	4-φ14
25	1	180	90	164/214	75/91	199/227	115	85	65	16	2	4-φ14
32	1 1/4	200	100	190/295	91/112	240/266	140	100	76	18	3	4-φ18
40	1 1/2	220	110	210/295	101/112	255/271	150	110	84	18	3	4-φ18
50	2	240	120	247/340	112/127	286/307	165	125	99	20	3	4-φ18
65	2 1/2	260	130	276/398	127/139	330/335	185	145	118	20	3	4-φ18
80	3	280	140	308/438	139/159	349/383	200	160	132	20	3	8-φ18
100	4	320	160	348/562	159/206	421/487	220	180	156	22	3	8-φ18
125	5	380	190	432/724	176/228	485/557	250	210	184	22	3	8-φ18
150	6	440	220	524/928	228/275	582/629	285	240	211	24	3	8-φ22
200	8	550	275	648/1033	275/324	702/750	340	295	266	24	3	12-φ22

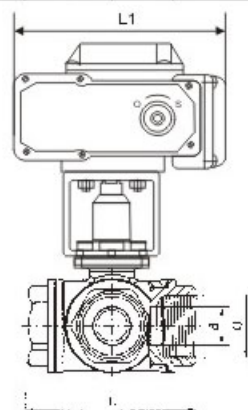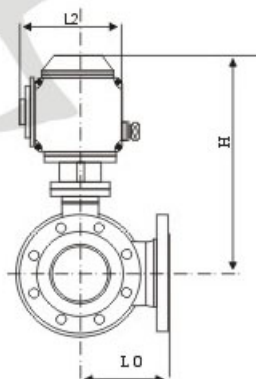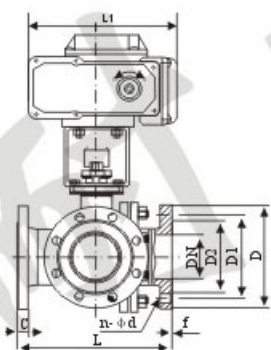

三、主要外形及连接尺寸

通径 Nominal size		外形连接尺寸 Outline flange size							
DN	in	d	G	L	L0	L1	L2	H	S
15	1/2	10	1/2"	68	34	140/178	62/75	130/136	26
20	3/4	15	3/4"	78	39	140/178	62/75	135/141	32
25	1	20	1"	86	43	140/214	62/91	139/173	38
32	1 1/4	25	1 1/4"	111	55.5	164/214	75/91	158/186	49
40	1 1/2	32	1 1/2"	126	63	164/246	75/101	165/203	56
50	2	38	2"	143	71.5	190/295	91/112	202/228	70
65	2 1/2								
80	3								

